


Linear Motion Bearings-Linear Ball Busings 直线轴承

LM..UUOP Series



Resin Retainer This type is a metric dimension series generally used in Asia and other countries.

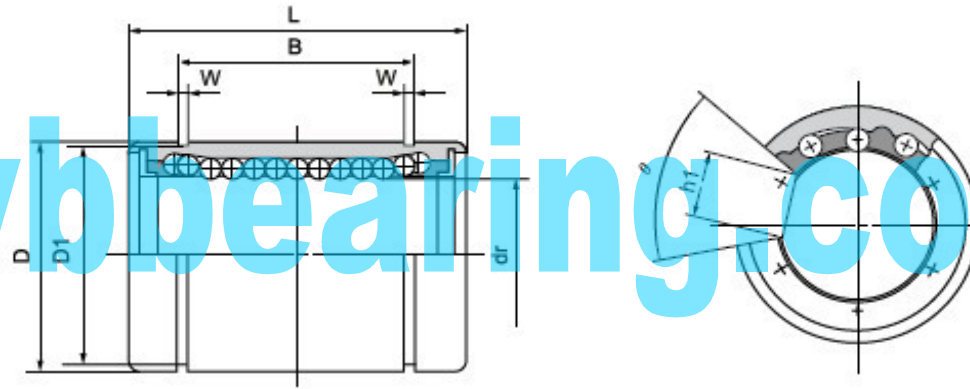

www.mvbbearing.com

开口型 Open Type LM...UU	密封型 Sealed Type LM..UUOP	钢球列数 Ball circuit	重量 Weight (g)	公称轴径 Nominal shaft dia. mm	dr		主要尺寸和公差 Major dimensions and tolerance(T)										偏心 Eccentricity μ m		最大 径向间隙 Radial Clearance (max) μ m	额定负荷 Basic load rating	
					公差Tolerance μ m		D		L		B		W	D1	h1	θ	精密 Precision	普通 High		动负荷 Dynamic C N	静负荷 Static Co N
					精密 Precision	普通 High	mm	公差 Tol. μ m	mm	公差 Tol. μ m	mm	公差 Tol. μ m									
LM10OP	LM10UUOP	3	23	10			19		29		22		1.3	18	6.8	80°			372	549	
LM12OP	LM12UUOP	3	25	12	0	0	21	0	30		23		1.3	20	8	80°	8	12	-4	510	784
LM13OP	LM13UUOP	3	34	13	-6	-9	23	-13	32	0	23	0	1.3	22	9	80°			510	784	
LM16OP	LM16UUOP	4	52	16			28		37		26.5		1.6	27	11	80°			774	1,180	
LM20OP	LM20UUOP	4	69	20			32		42		30.5		1.6	30.5	11	60°			-6	882	1,370
LM25OP	LM25UUOP	5	188	25	0	0	40	0	59		41		1.85	38	12	50°	10	15	980	1,570	
LM30OP	LM30UUOP	5	210	30	-7	-10	45	-16	64		44.5		1.85	43	15	50°			-8	1,570	2,740
LM35OP	LM35UUOP	5	335	35			52		70	0	49.5	0	2.1	49	17	50°			1,670	3,140	
LM40OP	LM40UUOP	5	500	40	0	0	60	0	80	-300	60.5	-300	2.1	57	20	50°	12	20	-10	2,160	4,020
LM50OP	LM50UUOP	5	1340	50	-8	-12	80	-19	100		74		2.6	76.5	25	50°			-13	3,820	7,940
LM60OP	LM60UUOP	5	1610	60	0	0	90	0	110		85		3.15	86.5	30	50°	17	25	4,700	10,000	
LM80OP	LM80UUOP	5	3650	80	0	-15	120	-22	140		106		4.15	116	40	50°			-20	7,350	16,000
LM100OP	LM100UUOP	5	7200	100	0	0	150	0	175	0	126	0	4.15	145	50	50°	20	30	14,100	34,800	
LM120OP	LM120UUOP	6	11600	120	-10	-20	180	-25	200	-400	159	-400	4.15	175	85	80°			-25	16,400	40,000
LM150OP	LM150UUOP	6	15700	150	0	0	210	0	240	-29	171	-29	5.15	204	105	80°	25	40	21,100	54,300	