


SBFCT200

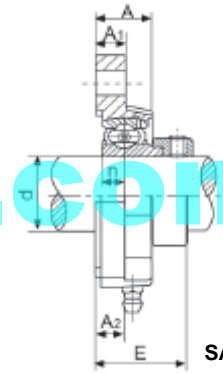

SAFCT200

SBFCT200 Series, Set Screw Locking

MVB BearingUnit No.	Shaft Dia d		Dimensions inch mm								Bolt Used		Bearing No.	Housing No.	Weight (kg)	
	(in)	(mm)	L	P	A1	A	A2	s	E	n	(mm)	(in)				
SBFCT201-8	1/2															
SBFCT202-9	9/16															
SBFCT202-10	5/8		3 3/16	2 1/2	27/64	3/4	27/64	9/32	1.0512	0.2362						
SBFCT203-11	11/16															
SBFCT201		12														
SBFCT202		15	81	63.5	10.7	19.1	10.7	7.1	26.7	6						
SBFCT203		17														
SBFCT204-12	3/4		3 9/16	2 13/16	7/16	25/32	7/16	11/32	1.1457	0.2756						
SBFCT204		20	90.5	71.4	11.1	19.8	11.1	8.7	29.1	7	M8	5/6	SB204-12	FCT204	0.32	
SBFCT205-13	13/16															
SBFCT205-14	7/8		3 3/4	3	13/32	25/32	13/32	11/32	1.1732	0.2953						
SBFCT205-15	15/16															
SBFCT205-16	1															
SBFCT205		25	95.2	76.2	10.3	19.8	10.3	8.7	29.8	7.5	M8	5/6	SB205-13	FCT205	0.36	
SBFCT206-17	1-1/16															
SBFCT206-18	1-1/8															
SBFCT206-19	1-3/16		4 7/16	3 9/16	31/64	7/8	31/64	13/32	1.3425	0.3150						
SBFCT206-20	1-1/4															
SBFCT206		30	113	90.5	12.1	22.2	12.1	10.3	34.1	8	M8	3/8	SB206-17	FCT206	0.57	
SBFCT207-20	1-1/4															
SBFCT207-21	1-5/16															
SBFCT207-22	1-3/8		4 13/16	3 15/16	33/64	15/16	33/64	13/32	1.4370	0.3346						
SBFCT207-23	1-7/16															
SBFCT207		35	122.5	100	12.7	23.8	12.7	10.3	36.5	8.5	M8	3/8	SB207-20	FCT207	0.71	

SAFCT200 Series, Eccentric Collar Locking

MVB BearingUnit No.	Shaft Dia d		Dimensions inch mm								Bolt Used		Bearing No.	Housing No.	Weight (kg)	
	(in)	(mm)	L	P	A1	A	A2	s	E	n	(mm)	(in)				
SAFCT201-8	1/2															
SAFCT202-9	9/16															
SAFCT202-10	5/8		3 3/16	2 1/2	27/64	3/4	27/64	9/32	1.2913	0.2362						
SAFCT203-11	11/16															
SAFCT201		12														
SAFCT202		15	81	63.5	10.7	19.1	10.7	7.1	32.8	6						
SAFCT203		17														
SAFCT204-12	3/4		3 9/16	2 13/16	7/16	25/32	7/16	11/32	1.3583	0.2756						
SAFCT204		20	90.5	71.4	11.1	19.8	11.1	8.7	34.5	7	M8	5/6	SA204-12	FCT204	0.34	
SAFCT205-13	13/16															
SAFCT205-14	7/8		3 3/4	3	13/32	25/32	13/32	11/32	1.4055	0.2953						
SAFCT205-15	15/16															
SAFCT205-16	1															
SAFCT205		25	95.2	76.2	10.3	19.8	10.3	8.7	35.7	7.5	M8	5/6	SA205-13	FCT205	0.39	
SAFCT206-17	1-1/16															
SAFCT206-18	1-1/8															
SAFCT206-19	1-3/16		4 7/16	3 9/16	31/64	7/8	31/64	13/32	1.5236	0.3150						
SAFCT206-20	1-1/4															
SAFCT206		30	113	90.5	12.1	22.2	12.1	10.3	38.7	8	M8	3/8	SA206-17	FCT206	0.61	
SAFCT207-20	1-1/4															
SAFCT207-21	1-5/16															
SAFCT207-22	1-3/8		4 13/16	3 15/16	33/64	15/16	33/64	13/32	1.6575	0.3346						
SAFCT207-23	1-7/16															
SAFCT207		35	122.5	100	12.7	23.8	12.7	10.3	42.1	8.5	M8	3/8	SA207-20	FCT207	0.82	

Note: For a relubricable unit add "G" suffix after unit number.(Ex. : SAFCT 205-16G)