


SBLF

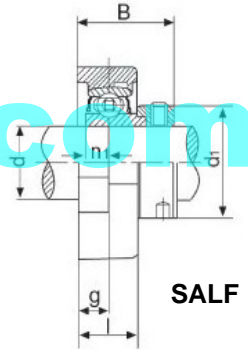

SALF

SBLF200 Series, Set Screw Locking

MVB Bearing Unit NO.	Shaft Dia d		Dimensions (inch / mm)										Bolt Size	Bearing No.	Housing No.	Weight (kg)
	(in)	(mm)	a	e	g	l	s	b	n	Bi	z	inch mm				
SBLF201-8	1/2													SB201-8	LF203	0.27
SBLF202-9	9/16		3 3/16	2 1/2	3/8	45/64	5/16	2 13/64	0.2362	1.0000	0.8661	1/4	SB202-9			
SBLF202-10	5/8												SB202-10			
SBLF203-11	11/16												SB203-11			
SBLF201		12											SB201			
SBLF202		15	81	63.5	9.5	18	8	56	6	25.5	22	M6	SB202			
SBLF203		17											SB203			
SBLF204-12	3/4		3 35/64	2 13/16	7/16	25/32	25/64	2 13/32	0.2756	1 9/64	0.9843	5/16	SB204-12	LF204	0.33	
SBLF204		20	90	71.5	11	20	10	61	7	29	25	M8	SB204			
SBLF205-13	13/16												SB205-13	LF205	0.38	
SBLF205-14	7/8		3 3/4	2 63/64	7/16	25/32	25/64	2 33/64	0.2953	1 13/64	1.0630	5/16	SB205-14			
SBLF205-15	15/16												SB205-15			
SBLF205-16	1												SB205-16			
SBLF205		25	95	76	11	20	10	64	7.5	30.5	27	M8	SB205			
SBLF206-17	1-1/16												SB206-17	LF206	0.56	
SBLF206-18	1-1/8		4 7/16	3 9/16	15/32	57/64	15/32	3	0.3150	1 11/32	1.181102	3/8	SB206-18			
SBLF206-19	1-3/16												SB206-19			
SBLF206-20	1-1/4												SB206-20			
SBLF206		30	113	90.5	12	22.5	12	76	8	34	30	M10	SB206			
SBLF207-20	1-1/4												SB207-20	LF207	0.8	
SBLF207-21	1-5/16		4 13/16	3 15/16	33/64	61/64	15/32	3 1/2	0.3346	1 7/16	1.2598	3/8	SB207-21			
SBLF207-22	1-3/8												SB207-22			
SBLF207-23	1-7/16												SB207-23			
SBLF207		35	122	100	13	24	12	89	8.5	36.5	32	M10	SB207			

SALF200 Series, Eccentric Collar Locking

MVB Bearing Unit NO.	Shaft Dia d		Dimensions (inch / mm)										Bolt Size	Bearing No.	Housing No.	Weight (kg)
	(in)	(mm)	a	e	g	l	s	b	n1	B	d1	inch mm				
SALF201-8	1/2													SA201-8	LF203	0.28
SALF202-9	9/16		3 3/16	2 1/2	3/8	45/64	5/16	2 13/64	0.2559	1 1/4	1.1260	1/4	SA202-9			
SALF202-10	5/8												SA202-10			
SALF203-11	11/16												SA203-11			
SALF201		12											SA201			
SALF202		15	81	63.5	9.5	18	8	56	6.5	31.6	28.6	M6	SA202			
SALF203		17											SA203			
SALF204-12	3/4		3 35/64	2 13/16	7/16	25/32	25/64	2 13/32	0.2953	1 23/64	1.3110	5/16	SA204-12	LF204	0.36	
SALF204		20	90	71.5	11	20	10	61	7.5	34.5	33.3	M8	SA204			
SALF205-13	13/16												SA205-13	LF205	0.42	
SALF205-14	7/8		3 3/4	2 63/64	7/16	25/32	25/64	2 33/64	0.2953	1 23/64	1.5000	5/16	SA205-14			
SALF205-15	15/16												SA205-15			
SALF205-16	1												SA205-16			
SALF205		25	95	76	11	20	10	64	7.5	34.5	38.1	M8	SA205			
SALF206-17	1-1/16												SA206-17	LF206	0.6	
SALF206-18	1-1/8		4 7/16	3 9/16	15/32	57/64	15/32	3	0.3543	1 33/64	1.7520	3/8	SA206-18			
SALF206-19	1-3/16												SA206-19			
SALF206-20	1-1/4												SA206-20			
SALF206		30	113	90.5	12	22.5	12	76	9	38.7	44.5	M10	SA206			
SALF207-20	1-1/4												SA207-20	LF207	0.85	
SALF207-21	1-5/16		4 13/16	3 15/16	33/64	61/64	15/32	3 1/2	0.3740	1 43/64	2.1890	3/8	SA207-21			
SALF207-22	1-3/8												SA207-22			
SALF207-23	1-7/16												SA207-23			
SALF207		35	122	100	13	24	12	89	9.5	42.4	55.6	M10	SA207			

Note: For a relubricable unit add "G" suffix after unit number.(Ex. : SALF 205-16G)